

Product: | Scrolled Steel Shutter Curtain  
Colours: | Natural Finish with Polyester Powder coats available

**Have you ever left your premises at night worrying how secure you have left everything? These days nobody knows for sure how, when or why thieves are targeting either areas or individual shops.**



A practical economic solution for day to day worries is Pasiguard Shopguard 75, manufactured from heavy duty 75mm scrolled steel shutter curtain, this provides a tough, durable physical barrier to safeguard your premises and your stock with a high resistance to burglary.

Available either manually (max size 3000mm x 3000mm) or electrically (max size 9000mm x 5000mm) operated the Shopguard 75 can be polyester powder coated to any standard RAL/BS colour to make your security a feature rather than an ugly addition to your premises. Every installation is custom made to suit the client's individual requirements. Constructed from 75mm galvanised steel interlocking lathes running in rolled steel guide channes which are usually either welded or bolted to 3mm steel angles providing secure fixings to the fabric of the building. The shutter curtain rolls up neatly into a casing, which can be either face fixed or in certain


applications be hidden above the bulkhead or behind above the bulkhead or behind a fascia sign.

Smooth running is guaranteed by either counterbalanced spring rollers for manual operation, or by a **SOMFY** or Ellard tubular motor for electric operation

All Pasiguard Roller installations are carried out by our trained operatives who undergo constant training to ensure that they provide as fast, efficient and trouble free fixing as possible. All new Pasiguard Roller shutter installations come with an automatic 12 month fully inclusive warranty.



**Product:** | Scrolled Steel Shutter Curtain  
**Colours:** | Natural Finish with Polyester Powder coats available

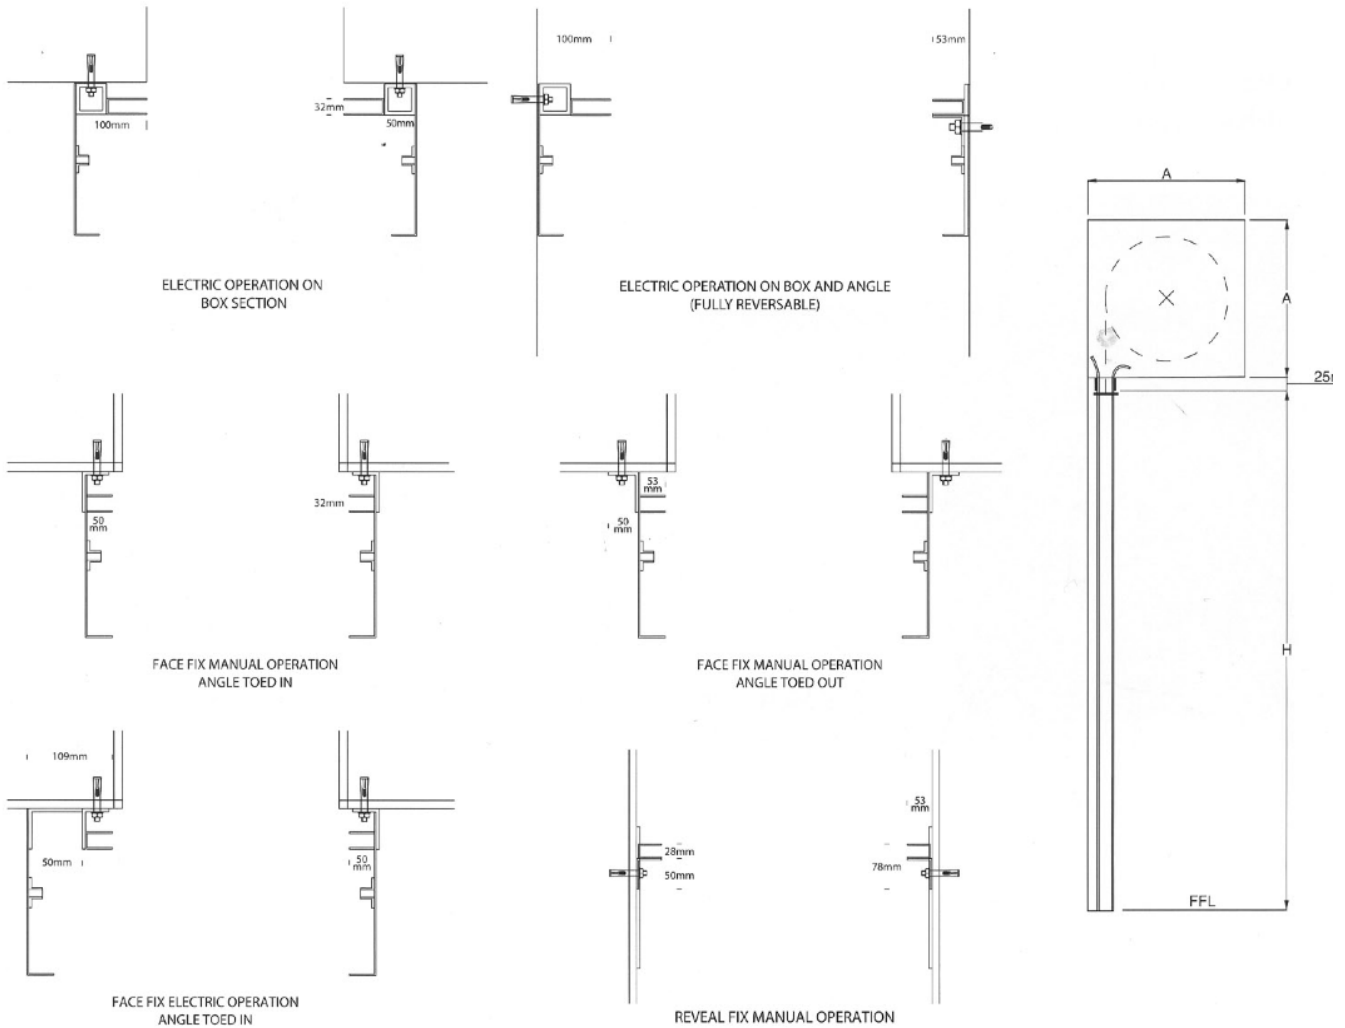

Please note: Guide and box sizes may vary depending on the size of the shutter

### ELECTRIC/MANUAL OPERATION

NORMAL ROLL	REVERSE ROLL	PLATE SIZE
HEIGHT 'H'	HEIGHT 'H'	
2133	1828	280
2670	2416	305
3302	2945	330

NB: Based on shutters less than 5m wide



Quality Systems Certificate No 247  
Assessed to ISO 9002



Certified to LPS 1056  
LPCB Reference No 247b01  
240 min Fireguard Roller Shutter  
Assessed up to 7m sq.



Certified to LPS 1197  
LPCB Reference No 247a  
For the maintenance and servicing  
of Fireguard Roller Shutters

**Disclaimer:**

Our policy is one of continuous improvement and we reserve the right to alter any of the above details without prior notification.