

Product: | Showcase Security Systems
Colours: | Natural Finish with Polyester Powder coats available

Do you leave your shop at night and worry if your store is safe but also wonder if you may be losing out on potential new business by not having your products on display to the public?



The practical and economical solution, which provides high security protection to commercial premises is the Viewguard 75, this allows you to be able to showcase your merchandise (with correct backlighting). Providing important burglary resistance and giving you peace of mind when you close up and go home.

Available either manually (max size 3000mm x 3000mm) or electrically (max size 9000mm x 5000mm) operated the Viewguard 75 can be polyester powder coated to any standard RAL/BS colour making your security a feature rather than an ugly addition to your premises. Every installation is custom made to suit the client's individual requirements.

Constructed from 75mm galvanised steel perforated interlocking lathes, running in rolled steel guide channels

which are usually either welded or bolted to 3mm steel angles, providing secure fixings to the fabric of the building. The shutter curtain rolls up neatly into a casing, which can be either face fixed or in certain applications be hidden above the bulkhead or behind a fascia sign.

Smooth running is guaranteed by either counterbalanced spring rollers for manual operation or by a **SOMFY** or Ellard tubular motor for electric operation.


All Pasiguard Roller installations are carried out by our trained operatives who undergo constant training to ensure that they provide as fast, efficient and trouble free fixing as possible. All new Pasiguard Roller shutter installations come with an automatic 12 month fully inclusive warranty.



PASIGUARD VIEWGUARD 75



Product: Showcase Security Systems
 Colours: Natural Finish with Polyester Powder coats available

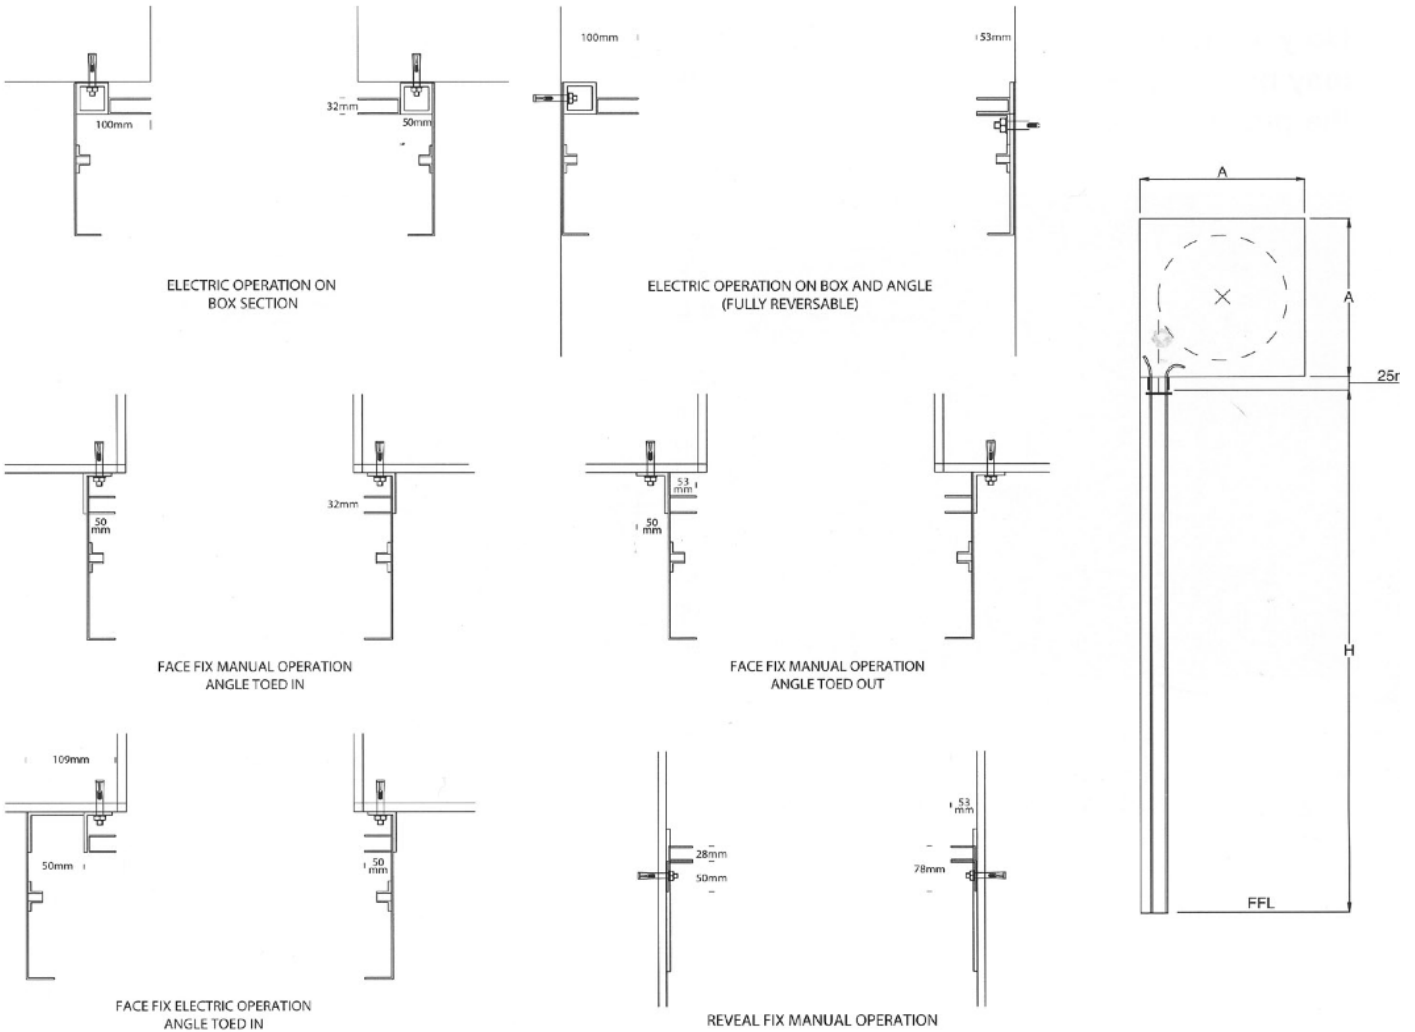

Please note: Guide and box sizes may vary depending on the size of the shutter


ELECTRIC/MANUAL OPERATION

NORMAL ROLL	REVERSE ROLL	PLATE SIZE
HEIGHT 'H'	HEIGHT 'H'	
2133	1828	280
2670	2416	305
3302	2945	330

NB: Based on shutters less than 5m wide



Quality Systems Certificate No 247
 Assessed to ISO 9002



Certified to LPS 1056
 LPCB Reference No 247b01
 240 min Fireguard Roller Shutter
 Assessed up to 7m sq.



Certified to LPS 1197
 LPCB Reference No 247a
 For the maintenance and servicing
 of Fireguard Roller Shutters

Disclaimer:

Our policy is one of continuous improvement and we reserve the right to alter any of the above details without prior notification.